


**Simultaneous SCADA Polling and ROCLink Diagnostics  
with SCADALink IP100**

During maintenance or troubleshooting, operators might be required to access a remote Fisher ROC / FloBoss through ROCLink. In a dedicated hardwired polling system this can only be done by breaking the SCADA Host physical connection to connect the ROC Host PC running the Fisher ROC diagnostic software.

For critical applications where downtime is costly, the disruption to polling can be avoided by using an IP100 to provide simultaneous access to the Fisher ROC / FloBoss.

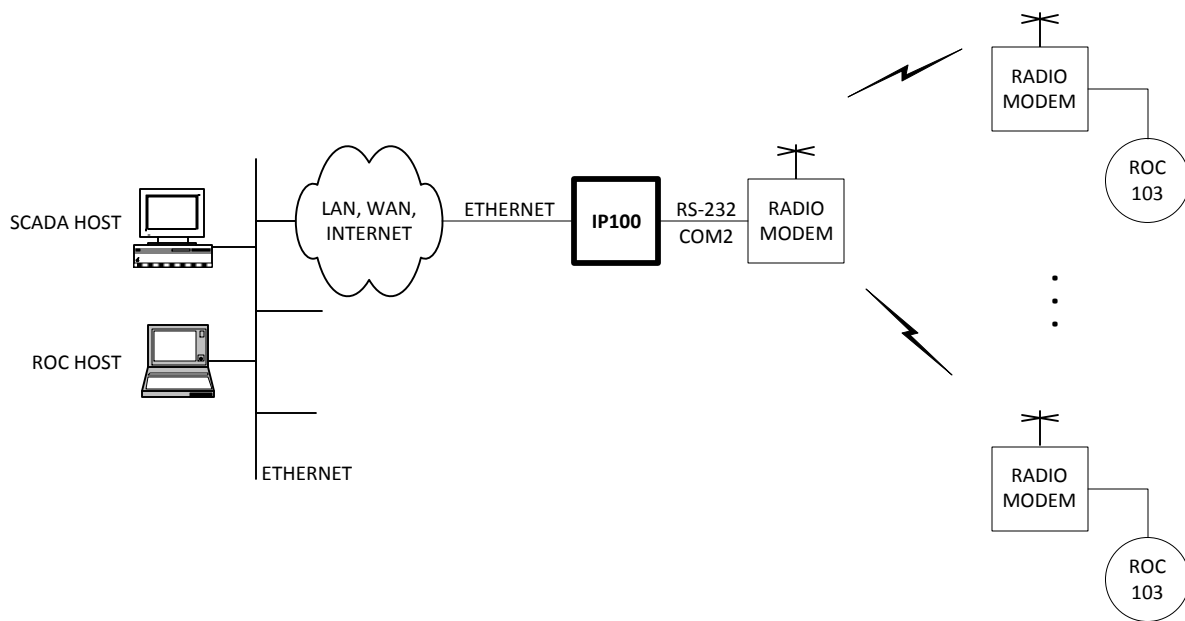

**Simultaneous SCADA Polling and ROC Diagnostics using IP100**

The SCADALink IP100 allows ROCLink access to the ROC/FloBoss RTU for maintenance and troubleshooting while maintaining SCADA polling. Note that the ROCLink and SCADA Host can be connected via either the LAN or serial connection and provides the multiplexing of the ROC Protocol to enable transparent operator access.